# D9WL





### D9WL

## Simple Dosing OFF-ROAD


Designed to purify, treat and disinfect water supply lines with flow rates of up to 9m³/hr:

- · Water towers, small reservoirs and water kiosks
- Disinfection and maintenance of water supply networks
- · Industrial and process water treatment
- Operates independently without electricity.
- Reliable, consistent dosing regardless of pressure and flow rate fluctuations.
- Simple installation and start-up, no electrical clearance required.
- Quick and easy on-site maintenance.
- Resistant to water, splashes and dust.





### DOSATRON Technology

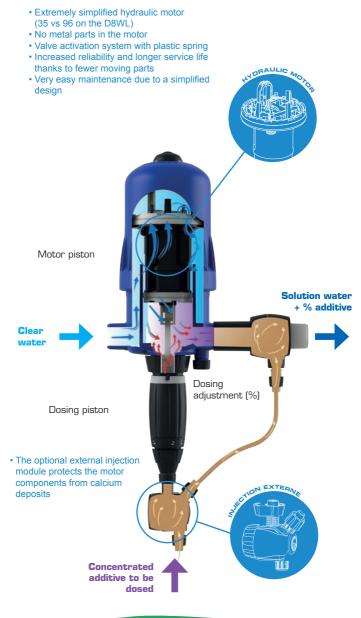

### **Specifications**

D9WL3000		
Motor flow rate:	0.5 m <sup>3</sup> /h - 9 m <sup>3</sup> /h	
Injection rate : % ratio	0.03 - 0.2 1:3000 - 1:500	
Injection flow rate:	0.15 l/h - 18 l/h	
Operating pressure:	0.3 - 8 bar	
Connection:	1" 1/2 Gas	

D9WL3000IE	
Motor flow rate:	0.5 m <sup>3</sup> /h - 9 m <sup>3</sup> /h
Injection rate : % ratio	0.03 - 0.2 1:3000 - 1:500
Injection flow rate:	0.15 l/h - 18 l/h
Operating pressure:	0.5 - 8 bar
Connection:	1" 1/2 Gas

D9WL2		
Motor flow rate:	0.5 m³/h - 9 m³/h	
Injection rate : % ratio	0.2 - 2 1:500 - 1:50	
Injection flow rate:	1 l/h - 180 l/h	
Operating pressure:	0.3 - 8 bar	
Connection:	1" 1/2 Gas	

D9WL5	
Motor flow rate:	0.5 m³/h - 9 m³/h
Injection rate : % ratio	1 - 5 1:100 - 1:20
Injection flow rate:	5 l/h - 450 l/h
Operating pressure:	0.5 - 8 bar
Connection:	1" 1/2 Gas





#### DOSATRON APP







www.dosatron.com







