



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

## 40 GPM: D40WL3000NIEAF

### PRODUCT DESCRIPTION

The Dosatron D40WL3000NIEAF-40 GPM injector is water-powered, along with being NSF/ANSI 61 & 372 Certified. There is no need for electricity with applications such as water potabilization, water disinfection, or water sanitation.

### PRODUCT SPECIFICATIONS

Dilution Range:	1:3000 to 1:800 (0.03% to 0.125%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	5 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Weight:	9 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual



Certified to NSF/ANSI 61 & 372

Call 800-523-8499 to order the Dosatron for your specific application




# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

## 40 GPM: D40WL3000NIEAF

### Bypass Installation

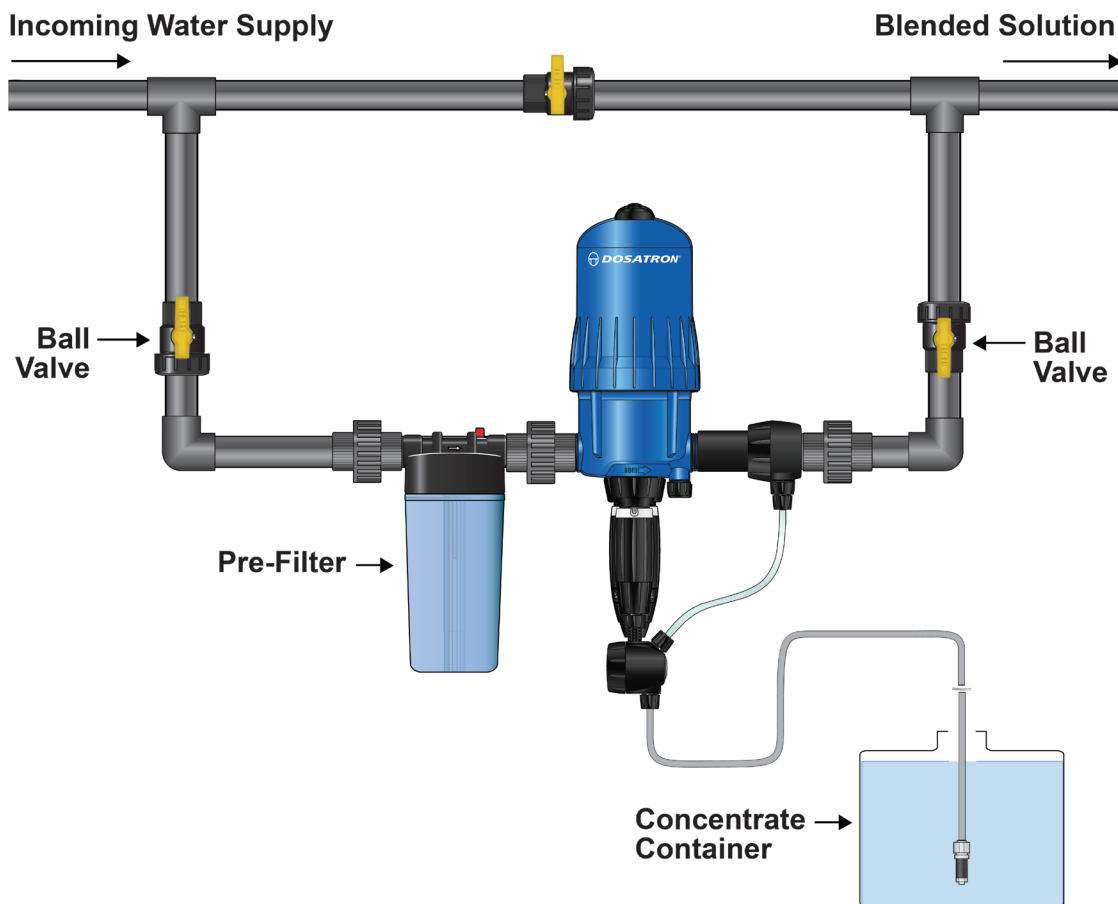

Dosatron International  
2090 Sunnysdale Blvd. • Clearwater, FL, USA  
800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.