



# DOSATRON®

An Ingersoll Rand Business

## 40 GPM: D40MZ5

### PRODUCT DESCRIPTION

The Dosatron D40MZ5, with flow up to 40 GPM, can be installed in parallel to increase the water flow. It's water-powered so no electricity is needed. It's easy to install and maintain with 63% fewer parts and a metal free piston.



### PRODUCT SPECIFICATIONS

Dilution Range:	1:100 to 1:20 (1% to 5%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	7.2 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve
Optional Accessories:	Bypass, part #: MPDI196

### MAINTENANCE KITS

Injection Seal Kit (Part#: PJDI122V) - For yearly maintenance

**Call 800-523-8499 to order the Dosatron for your specific application**




# DOSATRON®

An Ingersoll Rand Business

## 40 GPM: D40MZ5

### Recommended Basic Installation

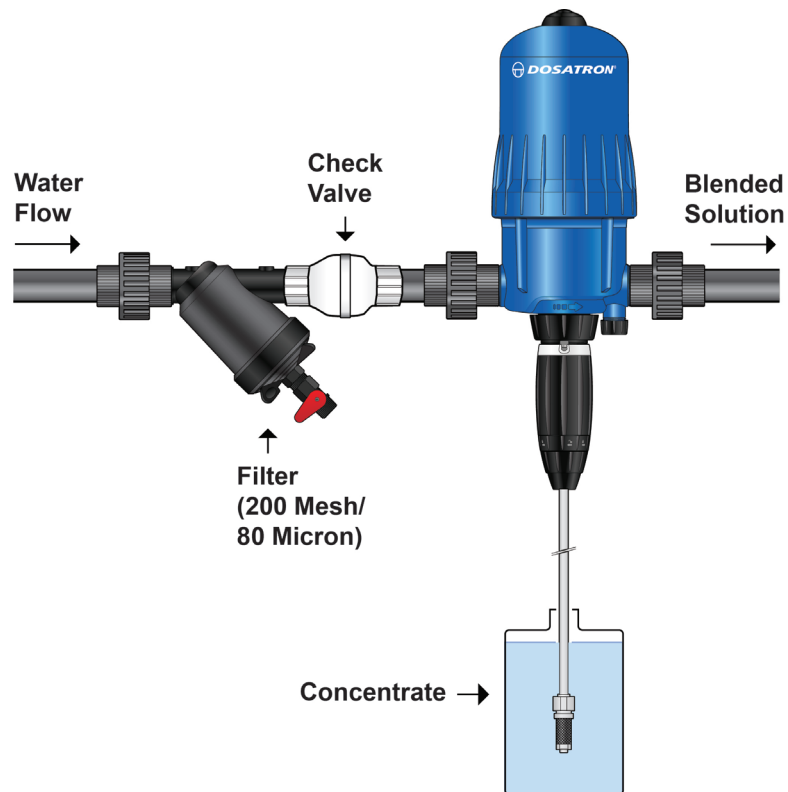

Dosatron International  
2090 Sunnysdale Blvd. • Clearwater, FL, USA  
800-523-8499 • [www.dosatron.com](http://www.dosatron.com)

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.