




DOSATRON®

WATER POWERED DOSING TECHNOLOGY

CONVERSIÓN DE DILUCIÓN

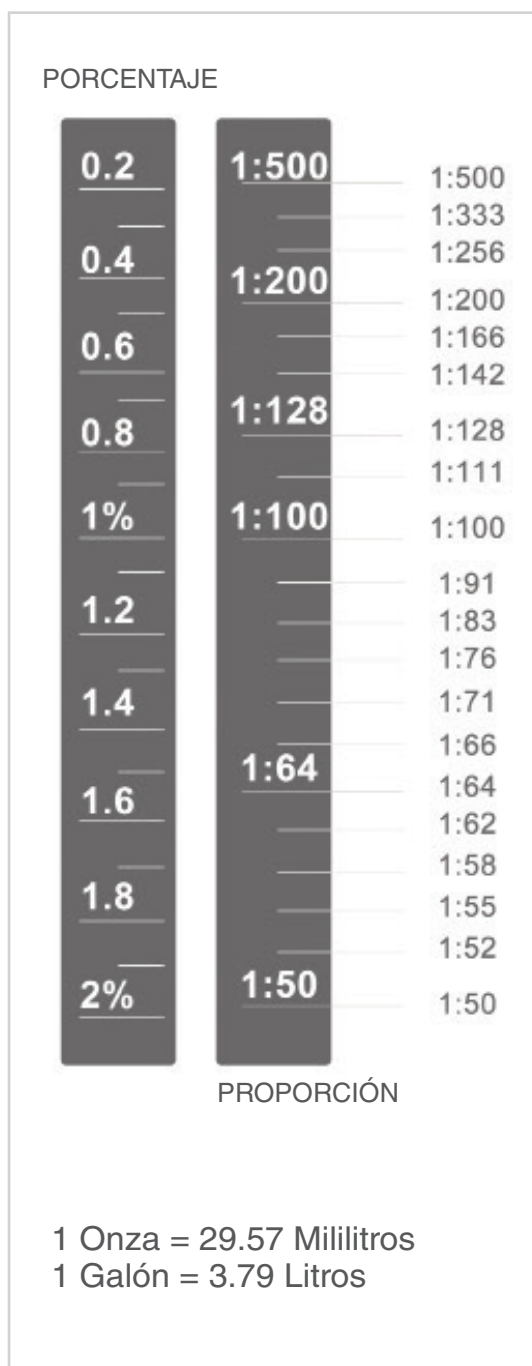

VOLUMEN DE PRODUCTO INYECTADO POR VOLUMEN DE AGUA QUE ENTRA			
PORCENTAJE	PROPORCIÓN (químico : agua)	ONZAS POR GALÓN US	MILILITROS POR LITRO
10	1:10	12.800	100
5	1:20	6.400	50
4	1:25	5.120	40
3.333	1:30	4.267	33.33
3.125	1:32	4.000	31.25
3.03	1:33	3.879	30.3
2.5	1:40	3.200	25
2	1:50	2.560	20
1.667	1:60	2.133	16.6
1.429	1:70	1.829	14.29
1.25	1:80	1.600	12.5
1.111	1:90	1.422	11.11
1	1:100	1.280	10
0.781	1:128	1.000	7.8
0.667	1:150	0.853	6.67
0.571	1:175	0.731	5.71
0.526	1:190	0.674	5.26
0.5	1:200	0.640	5
0.391	1:256	0.500	3.91
0.333	1:300	0.427	3.33
0.313	1:320	0.400	3.13
0.286	1:350	0.366	2.86
0.25	1:400	0.320	2.5
0.2	1:500	0.256	2
0.195	1:512	0.250	1.95
0.167	1:600	0.213	1.67
0.156	1:640	0.200	1.56
0.143	1:700	0.183	1.43
0.133	1:750	0.171	1.33
0.125	1:800	0.160	1.25
0.111	1:900	0.142	1.11
0.1	1:1000	0.128	1
0.08	1:1250	0.102	0.8
0.067	1:1500	0.085	0.67
0.050	1:2000	0.064	0.5
0.033	1:3000	0.043	0.33