

An Ingersoll Rand Business

40 GPM: D40MZ3000

PRODUCT DESCRIPTION

The Dosatron **D40MZ3000**, with flow up to 40 GPM, can be installed in parallel to increase the water flow. It's water-powered so no electricity is needed. It's easy to install and maintain with 63% fewer parts and a metal free piston.



| Dilution Range: | 1:3000 to 1:500 (0.03% to 0.2%) |
|------------------------------|---|
| Water Flow Range: | 2.2 to 40 GPM |
| Operating Pressure Range: | 4.3 to 116 PSI |
| Available Housing Materials: | Polypropylene (Standard Blue) |
| Dimensions: | 25 1/4" x 8 1/2" |
| Weight: | 12 lbs |
| Connection Size: | 1 1/2" NPT |
| Maximum Temperature: | 104 ^o F |
| Included Accessories: | 6' clear suction tube, weighted strainer, mounting bracket and operating manual |
| Recommended Accessories: | 200 mesh filter, check valve |
| Optional Accessories: | Bypass, part #: MPDI196 |



Mini-Maintenance Kit (Part#: PJDI216MINI) - For regular maintenance


Injection Seal Kit (Part#: PJDI216) - For yearly maintenance





40 GPM: D40MZ3000

Recommended Basic Installation

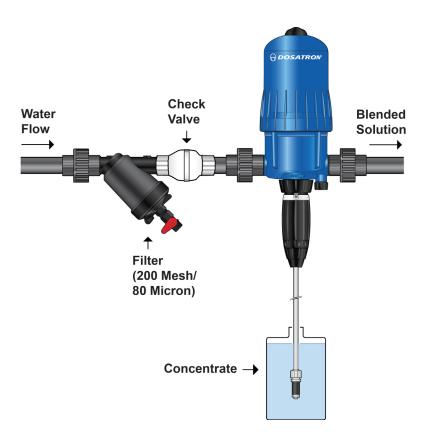

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatron.com