

An Ingersoll Rand Business

## 40 GPM: D40MZ2

## **PRODUCT DESCRIPTION**

The Dosatron **D40MZ2**, with flow up to 40 GPM, can be installed in parallel to increase the water flow. It's water-powered so no electricity is needed. It's easy to install and maintain with 63% fewer parts and a metal free piston.

## **PRODUCT SPECIFICATIONS**

Dilution Range:	1:500 to 1:50 (0.2% to 2%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	4.3 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104 <sup>0</sup> F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve
Optional Accessories:	Bypass, part #: MPDI196



#### MAINTENANCE KITS


Mini-Maintenance Kit (Part#: PJDI120VMINI-H) - For regular maintenance Injection Seal Kit (Part#: PJDI120V) - For yearly maintenance



An Ingersoll Rand Business

# 40 GPM: D40MZ2

### **Recommended Basic Installation**

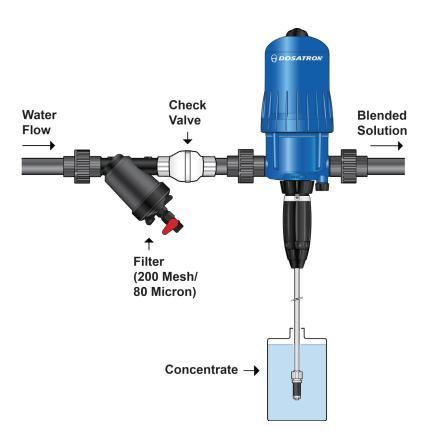

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatron.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.