

An Ingersoll Rand Business

14 GPM: D14MZ3000-D

PRODUCT DESCRIPTION

The water-powered Dosatron **D14MZ3000-D** is part of the **14 GPM** Carwash Series and has no Venturi tips to worry about, you just set it and forget it. With a ratio range of 1:3000 to 1:333, the **D14MZ3000-D** is easy to install and maintain.



| Dilution Range: | 1:3000 to 1:333 (0.03% to 0.3%) |
|----------------------------------|--|
| Water Flow Range: | 0.05 to 14 GPM |
| Operating Pressure Range: | 4.3 to 85 PSI |
| Available Housing Materials: | Polypropylene (Standard Blue) |
| Dimensions: | 21" x 6 5/16" |
| Weight: | 6 lbs |
| Connection Size: | 3/4" NPT |
| Maximum Temperature: | 104 ^o F |
| Included Accessories: | 6' clear suction tube, strainer, weight, mounting bracket and operating manual |
| Recommended Accessories: | pressure regulator, 200 mesh filter, check valve |



MAINTENANCE KITS

Mini-Maintenance Kit (Part#: PJDI139MINI) - For regular maintenance

Injection Seal Kit (Part#: PJDI139) - For yearly maintenance


Rebuild Kit (Part #: MKD14MZ3000) - Extends the life of your unit

Call 800-523-8499 to order the Dosatron for your specific application



14 GPM: D14MZ3000-D

Basic Installation

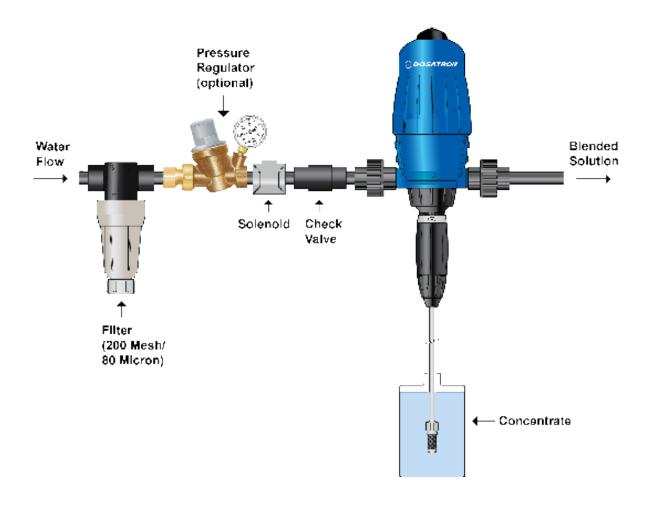

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatron.com